


FLANGE ADAPTOR

« MAJOR STOP »

Characteristics

- Compatible with PVC-BO, PVC-U PN16, PEHD PE80 ET PE100 PN16
- DN 40 to 200
- PFA 16 / ISO PN10/16
- Angular deviation +/-3°
- Guaranteed waterproof
- Corrosion-proof : cataphoretic coating
- T = +0°C à +60°C

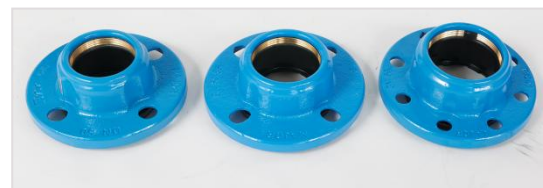

Function

Flange adaptor is used in PVC/PE pipe. It has a gasket and a restrained brass rings.

Range

Reference	DN (mm)	DE (mm)	L (mm)
6170252	DN50	Ø63	72
6170253	DN 60/65	Ø75	72
6170254	DN80	Ø90	76
6170255	DN100	Ø110	80
6170257	DN150	Ø160	90
6170258	DN200	Ø200	100

